



Main

Range of product	Modicon Quantum automation platform
Product or component type	Analogue input module
Type of filter	Notch filter - 3 dB at 50/60 Hz Single pole low pass - 3 dB at 20 Hz

Complementary

Analogue input number	8
Addressing requirement	10 input words
Analogue input type	Thermocouple - 210...760 °C thermocouple J Thermocouple - 270...1000 °C thermocouple E Thermocouple - 270...1370 °C thermocouple K Thermocouple - 270...400 °C thermocouple T Thermocouple - 50...1665 °C thermocouple R Thermocouple - 50...1665 °C thermocouple S
Analogue input resolution	16 bits
Input impedance	> 1 MOhm
Absolute accuracy error	+/- 2 °C plus + 0.1 % of reading thermocouple J +/- 2 °C plus + 0.1 % of reading thermocouple K +/- 2 °C plus + 0.1 % of reading thermocouple T +/- 4 °C plus + 0.1 % of reading thermocouple R +/- 4 °C plus + 0.1 % of reading thermocouple S +/- 2 °C plus + 0.1 % of reading thermocouple E
Linearity error	1 °C, 0.1 °C, 1 F, 0.1 F - 210...760 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...1000 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...1370 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...400 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 50...1665 °C
Accuracy drift according to temperature	0.15 µV/°C + 0.0015 % of reading/°C max low level voltage
Common mode rejection	>= 120 dB 50/60 Hz
Isolation between channels and bus	1780 V AC for 60 s 2500 V DC for 60 s
Isolation between channels	300 V DC

	220 V AC
Update time	1000 ms
Fault type	Broken wire Overtaking scale
Marking	CE
Cold junction compensation	Internal 0...60 °C
Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault 8 LEDs green channel is turned on 8 LEDs red channel fault
Bus current requirement	280 mA
Power dissipation in W	1.5 W
Module format	Standard
Product weight	0.3 kg

Environment

Protective treatment	Conformal coating Humiseal 1A33
Standards	CSA C22.2 No 142 UL 508
Product certifications	CUL FM Class 1 Division 2
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available End of life manual
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks



- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Thermocouple Input 8-Channel Module

Wiring Diagram

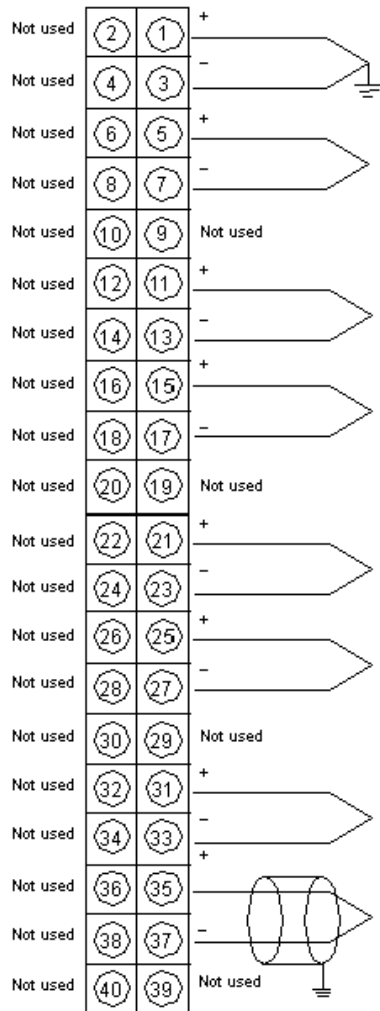

Using Cold Junction Compensation (CJC)

For temperature measurements, the module provides an internal CJC. However, a remote CJC can be used with the following TC types: J,K and T. The TC must be connected to Channel.

