



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Standalone

### Complementary

Input voltage	24 V DC 20...30 V
Input current	1600 mA
Inrush current	30 A
Input power interruption	1 ms 20 V 20 ms 25 V
Associated fuse rating	2.5 A slow-blow
Output voltage	5.1 V DC
Power supply output current	0.3...3 A standalone
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	2 + (3 x Iout) where Iout is in A
Local signalling	1 LED green power (PWR OK)
Marking	CE
Module format	Standard
Product weight	0.65 kg

### Environment

Protective treatment	Conformal coating Humiseal 1A33
Standards	CSA C22.2 No 142 UL 508
Product certifications	CUL FM Class 1 Division 2
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2

	8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

### Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1012 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available <a href="#">End of life manual</a>
Product end of life instructions	Available

### Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

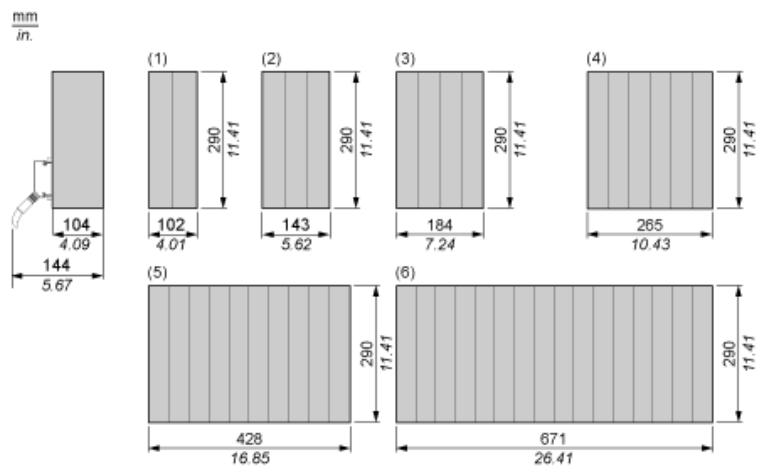

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

140CPS21100C

---

24 Vdc/3 A Power Supply Module

---

Wiring Diagram

