


Product data sheet

Characteristics

16004

analog ammeter AMP - 1.3 In without dial - 72 x 72 mm

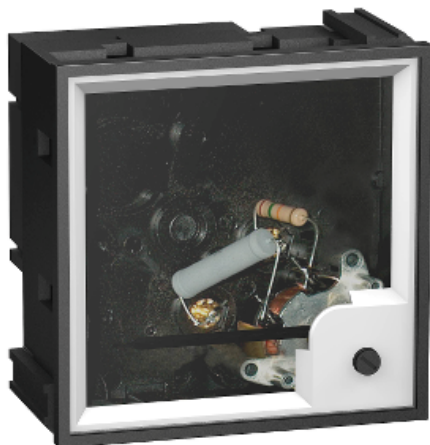

Main

Range	PowerLogic
Range of product	PowerLogic
Product name	PowerLogic AMP
Device short name	AMP
Product or component type	Ammeter
Range compatibility	Prisma G door Prisma P door
Technology type	Ferromagnetic
Scale type	62 mm over 90°
Mounting support	Front face

Complementary

Type of measurement	Current
Accuracy class	Class 1.5
Power consumption in VA	1.1 VA
Power consumption in VA	1.1 VA
Overload withstand	1.2 In, permanently 10 In, 5 s
Device mounting	Flush
Operating position	30°/Vertical
Width	72 mm
Height	72 mm
Depth	75 mm
Temperature drift	+/- 0.003 %/°C
Market segment	Residential Small commercial
Compatibility code	AMP

Environment

Standards	IEC 60051-1 IEC 61000-4 IEC 61010-1
-----------	---

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

IP degree of protection	IP52
Ambient air temperature for operation	-25...50 °C
Reference temperature	23 °C

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 0610 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold

Contractual warranty

Warranty period	18 months
-----------------	-----------