

Main

| | |
|--|--|
| Range | Compact |
| Range of product | Compact NS100...630 |
| Product or component type | Circuit breaker |
| Product name | Compact NS |
| Device short name | Vigicompact NS100N |
| Circuit breaker name | Vigicompact NS100N |
| Device application | Distribution |
| Poles description | 3P |
| Protected poles description | 3t |
| Network type | AC |
| Network frequency | 50/60 Hz |
| [In] rated current | 100 A 65 °C 100 A 40 °C |
| [Ui] rated insulation voltage | 750 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Uimp] rated impulse withstand voltage | 8 kV conforming to IEC 60947-2 |
| [Ue] rated operational voltage | 440 V AC 50/60 Hz conforming to IEC 60947-2 |
| Breaking capacity code | N |
| Breaking capacity | 8 kA Icu at 660/690 V AC 50/60 Hz conforming to IEC 60947-2 22 kA Icu at 525 V AC 50/60 Hz conforming to IEC 60947-2 25 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2 35 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 36 kA Icu at 380/415 V AC 50/60 Hz conforming to IEC 60947-2 85 kA Icu at 220/240 V AC 50/60 Hz conforming to IEC 60947-2 10 kA at 600 V AC 50/60 Hz conforming to UL 508 25 kA at 480 V AC 50/60 Hz conforming to UL 508 35 kA at 480 V AC 50/60 Hz conforming to NEMA AB1 HIC 8 kA at 600 V AC 50/60 Hz conforming to NEMA AB1 HIC 85 kA at 240 V AC 50/60 Hz conforming to NEMA AB1 HIC 85 kA at 240 V AC 50/60 Hz conforming to UL 508 |
| [Ics] rated service breaking capacity | Ics 11 kA 525 V AC 50/60 Hz conforming to IEC 60947-2 Ics 35 kA 440 V AC 50/60 Hz conforming to IEC 60947-2 Ics 36 kA 380/415 V AC 50/60 Hz conforming to IEC 60947-2 Ics 4 kA 660/690 V AC 50/60 Hz conforming to IEC 60947-2 Ics 85 kA 220/240 V AC 50/60 Hz conforming to IEC 60947-2 Ics 12.5 kA 500 V AC 50/60 Hz conforming to IEC 60947-2 |
| Suitability for isolation | Yes conforming to IEC 60947-2 |
| Utilisation category | Category A |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|----------------------------------|--|
| Trip unit name | TM-D |
| Trip unit technology | Thermal-magnetic |
| Trip unit rating | 25 A (40 °C) |
| Protection type | Short-circuit protection (magnetic) Earth-leakage protection Overload protection (thermal) |
| Earth-leakage add-on module name | MH |
| Earth-leakage protection | With |
| Pollution degree | 3 conforming to IEC 60947 |

Complementary


| | |
|--|--|
| Control type | Toggle |
| Mounting mode | Fixed |
| Mounting support | Backplate |
| Upside connection | Front |
| Downside connection | Front |
| Mechanical durability | 50000 cycles |
| Electrical durability | 30000 cycles 440 V AC 50/60 Hz In conforming to IEC 60947-2 50000 cycles 440 V AC 50/60 Hz In/2 conforming to IEC 60947-2 |
| Connection pitch | 35 mm |
| Local signalling | Positive contact indication |
| Long time pick-up adjustment type Ir | Adjustable |
| Long time pick-up adjustment range | 0.8...1 x In |
| Instantaneous pick-up adjustment type li | Fixed |
| Instantaneous pick-up adjustment range | 300 A |
| Earth-leakage protection class | Class A |
| Residual earth-leakage sensitivity adjustment type | Adjustable |
| [IΔn] residual earth-leakage sensitive adjustment | 0.3 A 1 A 10 A 0.03 A 3 A |
| Residual earth-leakage time delay adjustment type | Adjustable |
| Height | 236 mm |
| Width | 105 mm |
| Depth | 86 mm |
| Compatibility code | NS100 |

Environment

| | |
|---------------------------------------|-------------------------------|
| Standards | IEC 60947-2 |
| Product certifications | ASEFA ASTA LCIE KEMA |
| IP degree of protection | IP40 conforming to IEC 60529 |
| IK degree of protection | IK07 conforming to EN 50102 |
| Ambient air temperature for operation | -25...70 °C |
| Ambient air temperature for storage | -50...85 °C |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

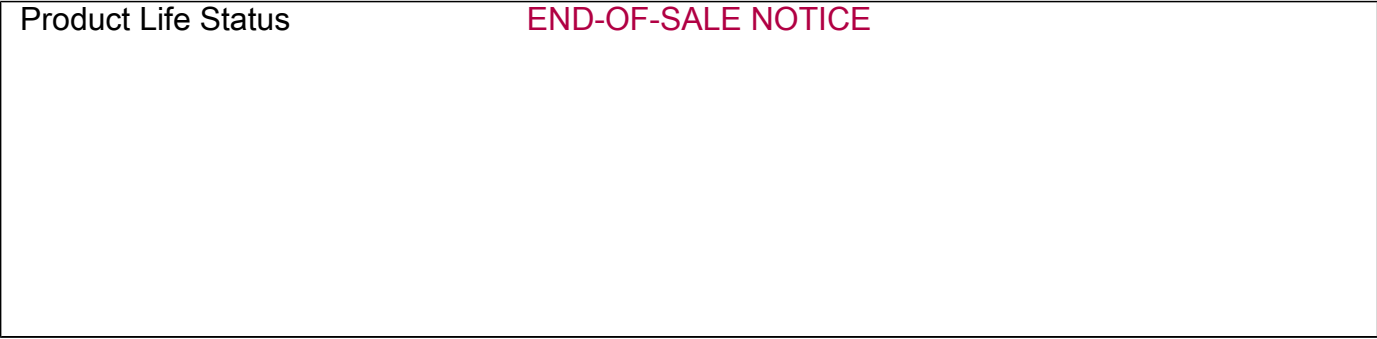

29934