


Product data sheet

Characteristics

CSU45999300DK

Performa - mesh tray - electro-zinc - 60 mm x 300 mm x 3000 mm

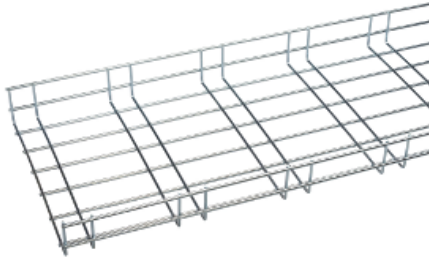

Main

Range of product	Performa
Product or component type	Mesh tray
Quantity per set	12 m

Complementary

Shape	U-shape
Material	Steel, electro-zinc
Atmospheric-corrosivity category	C1
Longitudinal wire diameter	3.9 mm
Transversal wire diameter	3.9 mm
Cable cross section	5268 mm ²
Standards	EN 50102 IEC 61537 IEC 60068-2-75 EN 12329 DIN 4102-12 EN/ISO 9227
Length	3 m
Height	60 mm
Width	300 mm
Height compatibility	60 mm
Width compatibility	300 mm
Surface treatment compatibility	Electro-zinc
Market segment	Small commercial

Environment

Ambient air temperature for operation	-40...120 °C
IK degree of protection	IK10

Offer Sustainability

RoHS (date code: YYWW) Compliant - since 1642 - Schneider Electric declaration of conformity
[Schneider Electric declaration of conformity](#)

REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations
