



Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Standalone

Complementary

Input voltage	120...230 V AC 100...276 V 47...63 Hz
Input current	200 mA 230 V 400 mA 115 V
Inrush current	10 A 230 V 20 A 115 V
Rated power in VA	50 VA
Associated fuse rating	1.5 A slow-blow
Harmonic distortion	<= 10 % of fundamental rms value
Output voltage	5.1 V DC
Power supply output current	3 A standalone
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	2 + (3 x Iout) where Iout is in A
Local signalling	1 LED green power (PWR OK)
Marking	CE
Module format	Standard
Product weight	0.65 kg

Environment

Standards	CSA C22.2 No 142 UL 508
Product certifications	FM Class 1 Division 2 CUL

Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0851 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available End of life manual
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

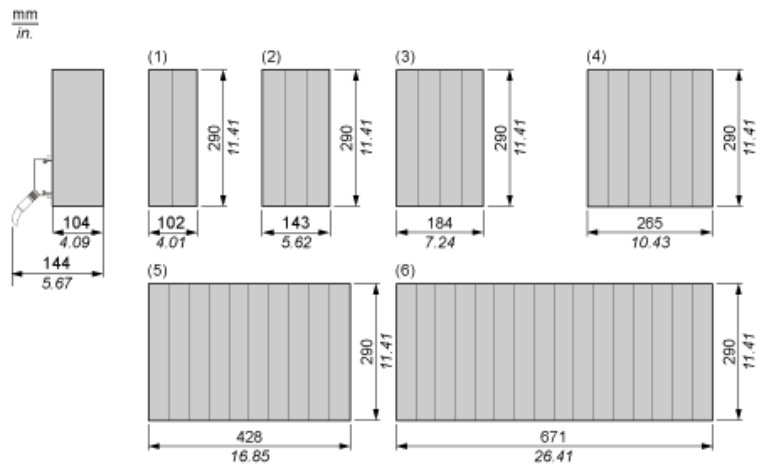

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

115/230 Vac, 3 A Power Supply Module

Wiring Diagram

