


Product data sheet
Characteristics

CSU4581340
 Performa Palt - mesh tray - electro-zinc - 95 mm x
 400 mm x 3000 mm

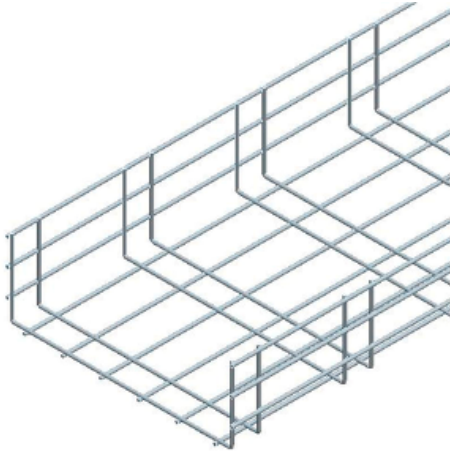

Main

Range of product	Performa
Product name	Palt
Product or component type	Mesh tray
Quantity per set	6 m

Complementary

Shape	U-shape
Material	Steel C4D, electro-zinc
Atmospheric-corrosivity category	C1
Longitudinal wire diameter	4.4 mm
Transversal wire diameter	3.9 mm
Cable cross section	40000 mm ²
Standards	EN 12329 DIN 4102-12 IEC 61537 EN 50102 IEC 60068-2-75 EN/ISO 9227
Load bearing capacity	101.3 N
Length	3 m
Height	100 mm
Width	400 mm
Height compatibility	95 mm
Width compatibility	400 mm
Surface treatment compatibility	Electro-zinc
Market segment	Utility Buildings Commercial Datacenter Healthcare

Environment

Ambient air temperature for operation	-40...120 °C
IK degree of protection	IK10

CSU4581340

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 1201 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------